





Product Features

- 24V Constant Voltage Flexible LED strip
- High color rendering index CRI>80
- Color range White(RED, GREEN, BLUE, AMBER)
- Beam Angle :120°
- Adjust the length cuttable after every 35,5mm
- All combinations with constant voltage LED Driver
- Self-adhesive 3M tape on the back side for simple installation
- Type of protection :IP00
- Life time(L70B50) >30.000 h, at Tc=55°C
- MOQ:5/meter

Application Areas

- Indoor lighting
- Decorative Lighting
- Cove Lighting
- Linear Lighting



RESİM HAZIRLANIYOR

General Specifications

Operation Voltage	~24V
Module Driver Type	Constant Voltage
LED Package	5050

Technical Specifications

Length(mm)	1000
Width(mm)	10
PCB Thicknes(mm)	0,35
PCB Material	Flexible

Electrical Specifications

Series	6
Parallel	10
Total LED Quantity	60

Connections Data

Wire size	0,34mm ²
Terminal Strip Length	100mm
Connection type	Cable soldering

Operating conditions and characteristics

Operating Temperature range	-20 ~ 50°C
Storage Temperature	-20 ~ 80°C

Driving Current & Luminous Flux @(T_j=25°C)

Operating Module Current	Operating Current per LED	Operating Voltage (Typ)	Module Power	2700K			3000K			4000K			5000K			6500K		
				min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.
625mA	62mA	24V	14,4W	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

- Tolerance range for optical and electrical data: $\pm 10\%$.
- Performe can be chone by used heatsink or fixture
- The situation that exceed the specified values, it may
- Due to the special conditions of manufacturing processes of LED, the typical data of technical parameters can only reflect statistical figures and could differ from

The situation that exceed the specified values, it may cause overload and decrease the lifetime of product. Even, it may render unoperational the LED module.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.



Product Features

- 24V Constant Voltage Flexible LED strip
- High color rendering index CRI>80
- Color range White(2700...6500K)
- Beam Angle :120°
- Adjust the length cuttable after every 35,5mm
- All combinations with constant voltage LED Driver
- Self-adhesive 3M tape on the back side for simple installation
- Type of protection :IP00
- Life time(L70B50) >50.000 h, at Tc=55°C
- MOQ:5/meter

Application Areas

- Indoor lighting
- Decorative Lighting
- Cove Lighting
- Linear Lighting



RESİM HAZIRLANIYOR

General Specifications

Operation Voltage	~24V
Module Driver Type	Constant Voltage
LED Package	3014-2835

Technical Specifications

Length(mm)	1000
Width(mm)	10
PCB Thicknes(mm)	0,35
PCB Material	Flexible

Electrical Specifications

Series	6
Parallel	10
Total LED Quantity	60

Connections Data

Wire size	0,34mm ²
Terminal Strip Length	100mm
Connection type	Cable soldering

Operating conditions and characteristics

Operating Temperature range	-20 ~ 50°C
Storage Temperature	-20 ~ 80°C

Driving Current & Luminous Flux @(T_j=25°C)

Operating Module Current	Operating Current per LED	Operating Voltage (Typ)	Module Power	2700K			3000K			4000K			5000K			6500K		
				min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.
625mA	62mA	24V	14,4W	1206	1341	1475	1206	1341	1475	1374	1527	1679	1539	1710	1881	1539	1710	1881

- Tolerance range for optical and electrical data: $\pm 10\%$.
- Performe can be chone by used heatsink or fixture
- The situation that exceed the specified values, it may
- Due to the special conditions of manufacturing processes of LED, the typical data of technical parameters can only reflect statistical figures and could differ from

The situation that exceed the specified values, it may cause overload and decrease the lifetime of product. Even, it may render unoperational the LED module.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.



Product Features

- 24V Constant Voltage Flexible LED strip
- High color rendering index CRI>80
- Color range White(2700...6500K)
- Beam Angle :120°
- Adjust the length cuttable after every 35,5mm
- All combinations with constant voltage LED Driver
- Self-adhesive 3M tape on the back side for simple installation
- Type of protection :IP00
- Life time(L70B50) >50.000 h, at Tc=55°C
- MOQ:5/meter

Application Areas

- Indoor lighting
- Decorative Lighting
- Cove Lighting
- Linear Lighting



RESİM HAZIRLANIYOR

General Specifications

Operation Voltage	24V
Module Driver Type	Constant Voltage
LED Package	2835

Technical Specifications

Length(mm)	1000
Width(mm)	8
PCB Thicknes(mm)	0,35
PCB Material	Flexible

Electrical Specifications

Series	6
Parallel	10
Total LED Quantity	60

Connections Data

Wire size	0,34mm ²
Terminal Strip Length	100mm
Connection type	Cable soldering

Operating conditions and characteristics

Operating Temperature range	-20 ~ 50°C
Storage Temperature	-20 ~ 80°C


Driving Current & Luminous Flux @(T_j=25°C)

Operating Module Current	Operating Current per LED	Operating Voltage (Typ)	Module Power	2700K			3000K			4000K			5000K			6500K		
				min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.
100mA	20mA	24V	4,8W	486	540	594	486	540	594	518	576	633	545	606	666	545	606	666

- Tolerance range for optical and electrical data: $\pm 10\%$.
- Performe can be chone by used heatsink or fixture
- The situation that exceed the specified values, it may
- Due to the special conditions of manufacturing processes of LED, the typical data of technical parameters can only reflect statistical figures and could differ from

The situation that exceed the specified values, it may cause overload and decrease the lifetime of product. Even, it may render unoperational the LED module.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

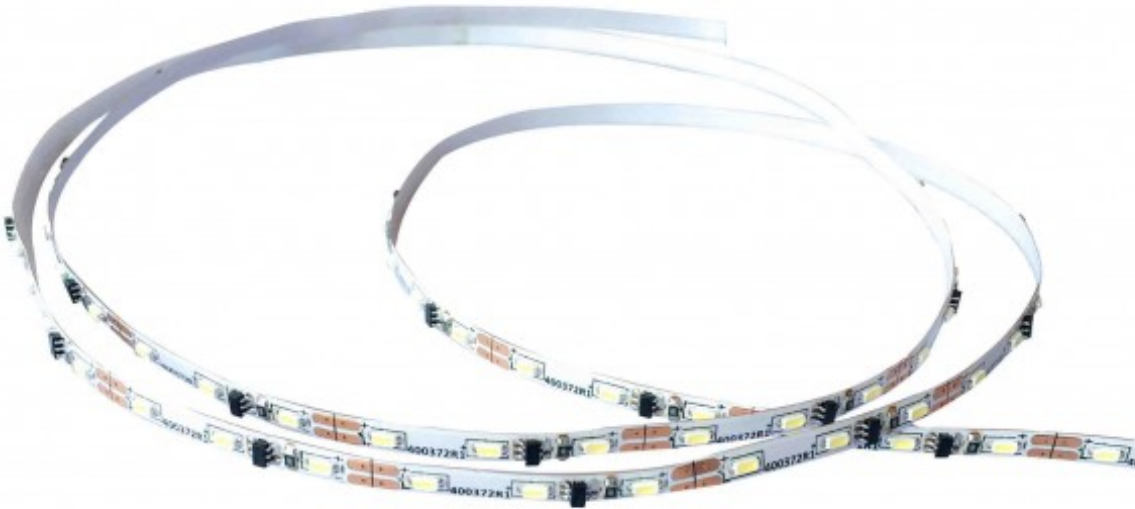

Product Features

- 12V Constant Voltage Flexible LED strip
- High color rendering index CRI>80
- Color range White(2700...6500K)
- Beam Angle :120°
- Adjust the length cuttable after every 35,5mm
- All combinations with constant voltage LED Driver
- Self-adhesive 3M tape on the back side for simple installation
- Type of protection :IP00
- Life time(L70B50) >50.000 h, at Tc=55°C
- MOQ:3/meter

Application Areas

- Indoor lighting
- Decorative Lighting
- Cove Lighting
- Linear Lighting



RESİM HAZIRLANIYOR

General Specifications

Operation Voltage	12V
Module Driver Type	Constant Voltage
LED Package	3014

Technical Specifications

Length(mm)	1000
Width(mm)	5
PCB Thicknes(mm)	0,35
PCB Material	Flexible

Electrical Specifications

Series	3
Parallel	34
Total LED Quantity	102

Connections Data

Wire size	0,34mm ²
Terminal Strip Length	100mm
Connection type	Cable soldering

Operating conditions and characteristics

Operating Temperature range	-20 ~ 50°C
Storage Temperature	-20 ~ 80°C


Driving Current & Luminous Flux @(T_j=25°C)

Operating Module Current	Operating Current per LED	Operating Voltage (Typ)	Module Power	2700K			3000K			4000K			5000K			6500K		
				min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.
1000mA	30mA	12V	12W	1202	1336	1469	1202	1336	1469	1294	1438	1582	1413	1570	1727	1413	1570	1727

- Tolerance range for optical and electrical data: $\pm 10\%$.
- Performe can be chone by used heatsink or fixture
- The situation that exceed the specified values, it may
- Due to the special conditions of manufacturing processes of LED, the typical data of technical parameters can only reflect statistical figures and could differ from

The situation that exceed the specified values, it may cause overload and decrease the lifetime of product. Even, it may render unoperational the LED module.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

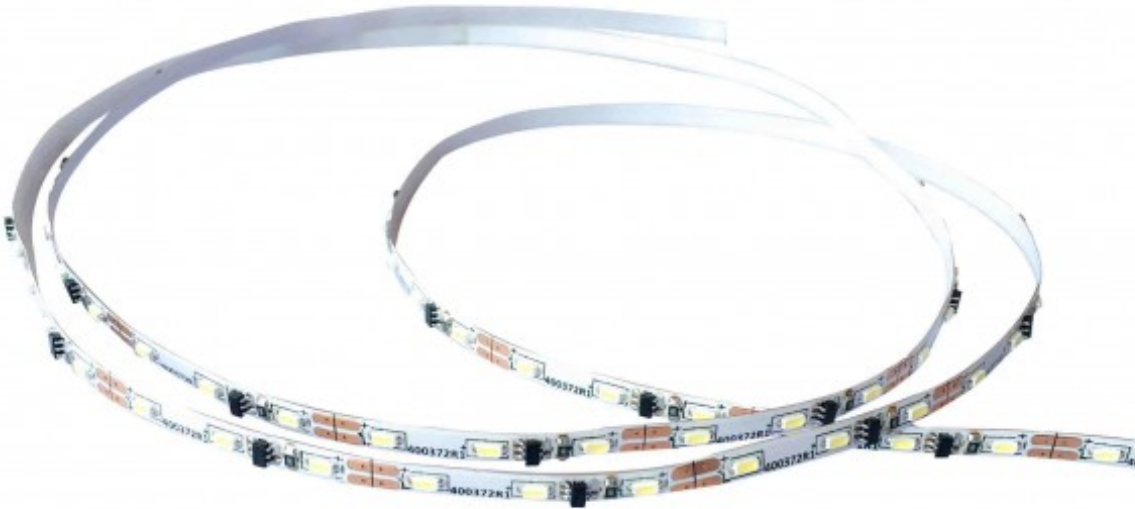

Product Features

- 12V Constant Voltage IC Flexible LED strip
- High color rendering index CRI>80
- Color range White(2700...6500K)
- Beam Angle :120°
- Adjust the length cuttable after every 35,5mm
- All combinations with constant voltage LED Driver
- Self-adhesive 3M tape on the back side for simple installation
- Type of protection :IP00
- Life time(L70B50) >50.000 h, at Tc=55°C
- MOQ:3/meter

Application Areas

- Indoor lighting
- Decorative Lighting
- Cove Lighting
- Linear Lighting



General Specifications	
Operation Voltage	12V
Module Driver Type	Constant Voltage
LED Package	3014

Technical Specifications	
Length(mm)	1000
Width(mm)	4
PCB Thicknes(mm)	0,35
PCB Material	Flexble

Electrical Specifications	
Series	3
Parallel	28
Total LED Quantity	84

Connections Data	
Wire size	0,34mm ²
Terminal Strip Length	100mm
Connection type	Cable soldering

Operating conditions and characteristics	
Operating Temperature range	-20 ~ 50°C
Storage Temperature	-20 ~ 80°C

Driving Current & Luminous Flux @(T _j =25°C)																		
Operating Module Current	Operating Current per LED	Operating Voltage (Typ)	Module Power	2700K			3000K			4000K			5000K			6500K		
				min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.
840mA	30mA	12V	10W	990	1100	1210	990	1100	1210	1065	1184	1302	1164	1293	1422	1164	1293	1422

- Tolerance range for optical and electrical data: ±10 %.
- Performe can be chone by used heatsink or fixture
- The situation that exceed the specified values, it may
- Due to the special conditions of manufacturing processes of LED, the typical data of technical parameters can only reflect statistical figures and could differ from

The situation that exceed the specified values, it may cause overload and decrease the lifetime of product. Even, it may render unoperational the LED module.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

UNECO 