


Product Features

- High efficiency 150lm/W
- High color rendering index CRI>80
- Color range White(2700...6500K)
- Beam Angle :120°
- Self-cooling (no additional heat sink required)
- Type of protection :IP00
- Life time(L70B50) >50.000 h, at Tc=55°C
- MOQ:9/pcs

Application Areas

- Decorative Lighting
- Downlight Application
- Office lighting
- Retail Lighting

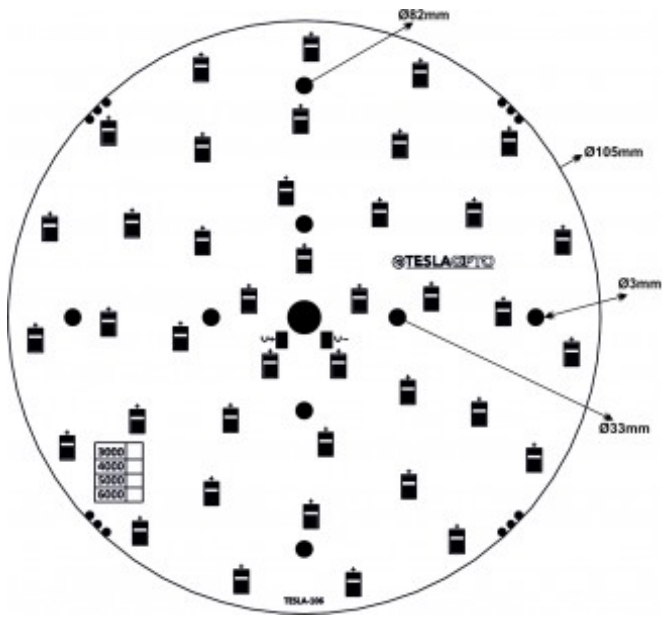

General Specifications

Operation Voltage	~24V
Module Driver Type	Constant Current
LED Package	2835

Technical Specifications

Length(mm)	105R
Width(mm)	
PCB Thickness(mm)	1,6
PCB Material	Aluminum

Electrical Specifications

Series	8
Parallel	5
Total LED Quantity	40

Connections Data

Wire size	0,35-0,75mm ²
Terminal Strip Length	3-4mm
Connection type	Cable soldering

Operating conditions and characteristics

Operating Temperature range	-20 ~ 50°C
Storage Temperature	-20 ~ 80°C

Driving Current & Luminous Flux @(T_j=25°C)

Operating Module Current	Operating Current per LED	Operating Voltage (Typ)	Module Power	2700K			3000K			4000K			5000K			6500K		
				min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.
350mA	70mA	23,2V	8,2W	1056	1112	1167	1056	1112	1167	1121	1180	1239	1185	1248	1310	1185	1248	1310
500mA	100mA	24V	12W	1440	1516	1591	1440	1516	1591	1527	1608	1688	1615	1700	1785	1615	1700	1785

- Tolerance range for optical and electrical data: ±10 %.
- Performe can be chone by used heatsink or fixture
- The situation that exceed the specified values, it may
- Due to the special conditions of manufacturing processes of LED, the typical data of technical parameters can only reflect statistical figures and could differ from

The situation that exceed the specified values, it may cause overload and decrease the lifetime of product. Even, it may render unoperational the LED module.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.