


Product Features

- High efficiency 150lm/W
- High color rendering index CRI>80
- Color range White(2700...6500K)
- Beam Angle :120°
- Self-cooling (no additional heat sink required)
- Type of protection :IP00
- Life time(L70B50) >50.000 h, at Tc=55°C
- MOQ:4/pcs

Application Areas

- Decorative Lighting
- Downlight Application
- Office lighting
- Retail Lighting

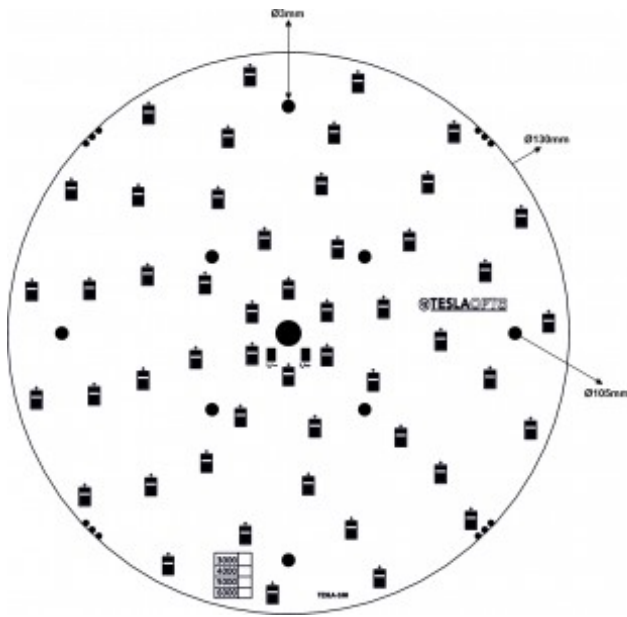

General Specifications

Operation Voltage	~30V
Module Driver Type	Constant Current
LED Package	2835

Technical Specifications

Length(mm)	130R
Width(mm)	
PCB Thickness(mm)	1,6
PCB Material	Aluminum

Electrical Specifications

Series	10
Parallel	5
Total LED Quantity	50

Connections Data

Wire size	0,35-0,75mm ²
Terminal Strip Length	3-4mm
Connection type	Cable soldering

Operating conditions and characteristics

Operating Temperature range	-20 ~ 50°C
Storage Temperature	-20 ~ 80°C

Driving Current & Luminous Flux @(T_j=25°C)

Operating Module Current	Operating Current per LED	Operating Voltage (Typ)	Module Power	2700K			3000K			4000K			5000K			6500K		
				min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.	min.	Typ.	max.
350mA	70mA	29V	10,2W	1320	1390	1459	1320	1390	1459	1401	1475	1548	1482	1560	1638	1482	1560	1638
500mA	100mA	30V	15W	1800	1895	1989	1800	1895	1989	1909	2010	2110	2018	2125	2231	2018	2125	2231

- Tolerance range for optical and electrical data: ±10 %.
- Performe can be chone by used heatsink or fixture
- The situation that exceed the specified values, it may
- Due to the special conditions of manufacturing processes of LED, the typical data of technical parameters can only reflect statistical figures and could differ from

The situation that exceed the specified values, it may cause overload and decrease the lifetime of product. Even, it may render unoperational the LED module.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.